


ECO SAC® - HIDDEN WATER STORAGE

Latest Generation of Hidden Rainwater Storage

• When it Rains, it Stores • Hides under Floor & Decks

- Rigid pipe-work and NO moving parts for watertight connections under AS/NZS 3500
- Meets drinking water standards
- 66 standard sizes plus custom sizes
- 100mm or 90mm standard PVC inlet for max water flow
- Unique serial number for warranty registration
- Join multiple sacs together with 100mm manifold for increased filling capacity and storage
- Galvanised Steel Frame to secure Eco Sac® in place
- 10 year warranty

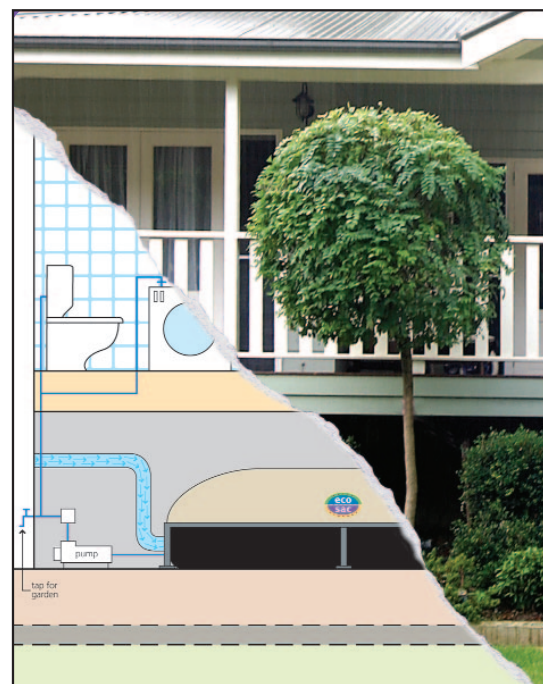

- Available in 66 different sizes
- ALL Bladders fill to a maximum height of 600mm
- Some other custom widths and lengths available

Lengths in metres

			3.0m	3.5m	4.0m	4.5m	5.0m	5.5m	6.0m	6.5m	7.0m	7.5m	8.0m
WIDTHS in metres	1.1m	Part # Actual Capacity (Litres)	ESK1130 1700	ESK1135 1950	ESK1140 2200	ESK1145 2500	ESK1150 2800	ESK1155 3100	ESK1160 3400	ESK1165 3650	ESK1170 3900	ESK1175 4200	ESK1180 4500
	1.3m	Part # Actual Capacity (Litres)	ESK1330 2000	ESK1335 2300	ESK1340 2650	ESK1345 2950	ESK1350 3300	ESK1355 3650	ESK1360 4000	ESK1365 4300	ESK1370 4650	ESK1375 5000	ESK1380 5300
	1.5m	Part # Actual Capacity (Litres)	ESK1530 2300	ESK1535 2700	ESK1540 3050	ESK1545 3450	ESK1550 3800	ESK1555 4200	ESK1560 4600	ESK1565 5000	ESK1570 5350	ESK1575 5750	ESK1580 6100
	1.7m	Part # Actual Capacity (Litres)	ESK1730 2600	ESK1735 3000	ESK1740 3500	ESK1745 3900	ESK1750 4350	ESK1755 4750	ESK1760 5200	ESK1765 5650	ESK1770 6050	ESK1775 6500	ESK1780 6950
	1.9m	Part # Actual Capacity (Litres)	ESK1930 2900	ESK1935 3400	ESK1940 3900	ESK1945 4350	ESK1950 4850	ESK1955 5350	ESK1960 5800	ESK1965 6300	ESK1970 6800	ESK1975 7250	ESK1980 7750
	2.1m	Part # Actual Capacity (Litres)	ESK2130 3200	ESK2135 3750	ESK2140 4300	ESK2145 4800	ESK2150 5350	ESK2155 5900	ESK2160 6400	ESK2165 7000	ESK2170 7500	ESK2175 8050	ESK2180 8600

Eco Sac® KIT includes:

- Eco Sac® rainwater storage bladder
- Mosquito protected 25mm air vent
- 100mm or 90mm standard PVC inlet
- Customised geo-textile harness
- All required fasteners
- Failsafe relief flap
- 2 x 32mm outlets & ball valves with locking nuts
- Galvanised steel frame & mounting plate

